

# Technical data sheet

## Surge protection, arrester, type 3



### Fine power protection / socket bar




CNS 3-D: Type 3 surge protection device to DIN EN 61643-11, intended for use in protective contact sockets.

- With visual and audible signalling, function display
- 3-way socket
- Length of connection cable: 2 m
- Y-circuit for high electrical safety


Application: For example, the protection of PCs, printers, copiers, fax machines, etc.

Type	Country version	Colour	Connection cable length m	Pack. pcs	Weight kg/100 pcs.	Item No.
CNS 3-D-D	EN	Black	2	1	65,000	5092701

#### Dimensions

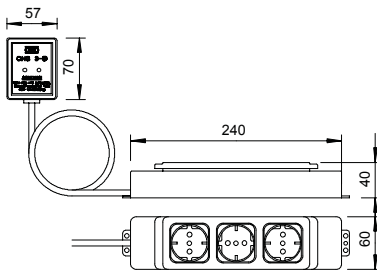

#### Connection options



#### CNS 3-D-D

Nominal voltage V	$U_n$	230
Max. continuous operating voltage V	$U_c$	255
SPD to EN 61643-11		Type 3
SPD to IEC 61643-11		class III
Lightning protection zone LPZ		2→3
Nominal discharge current (8/20) kA	$I_n$	2.5
Protection level (L-N) kV		< 1.0
Protection level (N-PE) kV		< 1.5
Maximum back-up fuse A		16
Response time ns	$t_a$	<25