

Thyristor \ Diode Module

$$V_{RRM} = 2 \times 1800 \text{ V}$$

$$I_{TAV} = 110 \text{ A}$$

$$V_T = 1.21 \text{ V}$$

Phase leg

Part number

MCMA110PD1800TB



Backside: isolated

 E72873



Features / Advantages:

- Thyristor for line frequency
- Planar passivated chip
- Long-term stability
- Direct Copper Bonded Al₂O₃-ceramic

Applications:

- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power control
- Lighting and temperature control

Package: TO-240AA

- Isolation Voltage: 4800 V~
- Industry standard outline
- RoHS compliant
- Soldering pins for PCB mounting
- Base plate: DCB ceramic
- Reduced weight
- Advanced power cycling

Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.



Rectifier				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
$V_{RSM/DSM}$	max. non-repetitive reverse/forward blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				1900	V
$V_{RRM/DRM}$	max. repetitive reverse/forward blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				1800	V
$I_{R/D}$	reverse current, drain current	$V_{R/D} = 1800\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			100	μA
		$V_{R/D} = 1800\text{ V}$	$T_{VJ} = 140^{\circ}\text{C}$			10	mA
V_T	forward voltage drop	$I_T = 110\text{ A}$	$T_{VJ} = 25^{\circ}\text{C}$			1.24	V
		$I_T = 220\text{ A}$				1.52	V
		$I_T = 110\text{ A}$	$T_{VJ} = 125^{\circ}\text{C}$			1.21	V
		$I_T = 220\text{ A}$				1.57	V
I_{TAV}	average forward current	$T_C = 85^{\circ}\text{C}$	$T_{VJ} = 140^{\circ}\text{C}$			110	A
$I_{T(RMS)}$	RMS forward current	180° sine				170	A
V_{T0}	threshold voltage	} for power loss calculation only	$T_{VJ} = 140^{\circ}\text{C}$			0.85	V
r_T	slope resistance					3.3	m Ω
R_{thJC}	thermal resistance junction to case					0.3	K/W
R_{thCH}	thermal resistance case to heatsink				0.2		K/W
P_{tot}	total power dissipation		$T_C = 25^{\circ}\text{C}$			380	W
I_{TSM}	max. forward surge current	$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 45^{\circ}\text{C}$			1.90	kA
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			2.05	kA
		$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 140^{\circ}\text{C}$			1.62	kA
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			1.75	kA
I^2t	value for fusing	$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 45^{\circ}\text{C}$			18.1	kA ² s
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			17.5	kA ² s
		$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 140^{\circ}\text{C}$			13.0	kA ² s
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			12.7	kA ² s
C_J	junction capacitance	$V_R = 400\text{ V}$ $f = 1\text{ MHz}$	$T_{VJ} = 25^{\circ}\text{C}$		95		pF
P_{GM}	max. gate power dissipation	$t_p = 30\text{ }\mu\text{s}$	$T_C = 140^{\circ}\text{C}$			10	W
		$t_p = 300\text{ }\mu\text{s}$				5	W
P_{GAV}	average gate power dissipation					0.5	W
$(di/dt)_{cr}$	critical rate of rise of current	$T_{VJ} = 140^{\circ}\text{C}; f = 50\text{ Hz}$ repetitive, $I_T = 330\text{ A}$				150	A/ μs
		$t_p = 200\text{ }\mu\text{s}; di_G/dt = 0.45\text{ A}/\mu\text{s};$ $I_G = 0.45\text{ A}; V = \frac{2}{3} V_{DRM}$ non-repet., $I_T = 110\text{ A}$				500	A/ μs
$(dv/dt)_{cr}$	critical rate of rise of voltage	$V = \frac{2}{3} V_{DRM}$	$T_{VJ} = 140^{\circ}\text{C}$			1000	V/ μs
		$R_{GK} = \infty$; method 1 (linear voltage rise)					
V_{GT}	gate trigger voltage	$V_D = 6\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			1.5	V
			$T_{VJ} = -40^{\circ}\text{C}$			1.6	V
I_{GT}	gate trigger current	$V_D = 6\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			150	mA
			$T_{VJ} = -40^{\circ}\text{C}$			200	mA
V_{GD}	gate non-trigger voltage	$V_D = \frac{2}{3} V_{DRM}$	$T_{VJ} = 140^{\circ}\text{C}$			0.2	V
I_{GD}	gate non-trigger current					10	mA
I_L	latching current	$t_p = 10\text{ }\mu\text{s}$	$T_{VJ} = 25^{\circ}\text{C}$			200	mA
		$I_G = 0.45\text{ A}; di_G/dt = 0.45\text{ A}/\mu\text{s}$					
I_H	holding current	$V_D = 6\text{ V}$ $R_{GK} = \infty$	$T_{VJ} = 25^{\circ}\text{C}$			200	mA
t_{gd}	gate controlled delay time	$V_D = \frac{1}{2} V_{DRM}$	$T_{VJ} = 25^{\circ}\text{C}$			2	μs
		$I_G = 0.45\text{ A}; di_G/dt = 0.45\text{ A}/\mu\text{s}$					
t_q	turn-off time	$V_R = 100\text{ V}; I_T = 110\text{ A}; V = \frac{2}{3} V_{DRM}$ $T_{VJ} = 125^{\circ}\text{C}$ $di/dt = 10\text{ A}/\mu\text{s}$ $dv/dt = 20\text{ V}/\mu\text{s}$ $t_p = 200\text{ }\mu\text{s}$			185		μs

Package TO-240AA				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal				200	A
T_{VJ}	virtual junction temperature			-40		140	°C
T_{op}	operation temperature			-40		125	°C
T_{stg}	storage temperature			-40		125	°C
Weight					81		g
M_D	mounting torque			2.5		4	Nm
M_T	terminal torque			2.5		4	Nm
$d_{Spp/App}$	creepage distance on surface striking distance through air	terminal to terminal	13.0	9.7			mm
$d_{Spb/Apb}$		terminal to backside	16.0	16.0			mm
V_{ISOL}	isolation voltage	t = 1 second	50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA	4800			V
		t = 1 minute		4000			V



Part description

M = Module
 C = Thyristor (SCR)
 M = Thyristor
 A = (up to 1800V)
 110 = Current Rating [A]
 PD = Phase leg
 1800 = Reverse Voltage [V]
 TB = TO-240AA-1B

Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	MCMA110PD1800TB	MCMA110PD1800TB	Box	36	

Equivalent Circuits for Simulation

* on die level

$T_{VJ} = 140^{\circ}\text{C}$




Thyristor

$V_{0\max}$	threshold voltage	0.85	V
$R_{0\max}$	slope resistance *	2.1	mΩ

Technical drawing of a 5-pin DIN connector. The drawing shows the front and side views with the following dimensions:

- Overall width: 92 ± 0.5
- Distance between mounting holes: 80 ± 0.3
- Overall height: 20.8 ± 0.25
- Distance from mounting hole to first pin: 14.8
- Distance between pins 1 and 2: 10 ± 0.1
- Distance from pin 2 to pin 3: 5.5 ± 0.1
- Pin diameter: $M5$
- Pin 1 length: 1
- Pin 2 length: 2
- Pin 3 length: 3
- Pin 4 length: 4
- Pin 5 length: 5
- Pin 6 length: 6
- Pin 7 length: 7
- Pin 8 length: 8
- Pin 9 length: 9
- Pin 10 length: 10
- Pin 11 length: 11
- Pin 12 length: 12
- Pin 13 length: 13
- Pin 14 length: 14
- Pin 15 length: 15
- Pin 16 length: 16
- Pin 17 length: 17
- Pin 18 length: 18
- Pin 19 length: 19
- Pin 20 length: 20
- Pin 21 length: 21
- Pin 22 length: 22
- Pin 23 length: 23
- Pin 24 length: 24
- Pin 25 length: 25
- Pin 26 length: 26
- Pin 27 length: 27
- Pin 28 length: 28
- Pin 29 length: 29
- Pin 30 length: 30
- Pin 31 length: 31
- Pin 32 length: 32
- Pin 33 length: 33
- Pin 34 length: 34
- Pin 35 length: 35
- Pin 36 length: 36
- Pin 37 length: 37
- Pin 38 length: 38
- Pin 39 length: 39
- Pin 40 length: 40
- Pin 41 length: 41
- Pin 42 length: 42
- Pin 43 length: 43
- Pin 44 length: 44
- Pin 45 length: 45
- Pin 46 length: 46
- Pin 47 length: 47
- Pin 48 length: 48
- Pin 49 length: 49
- Pin 50 length: 50
- Pin 51 length: 51
- Pin 52 length: 52
- Pin 53 length: 53
- Pin 54 length: 54
- Pin 55 length: 55
- Pin 56 length: 56
- Pin 57 length: 57
- Pin 58 length: 58
- Pin 59 length: 59
- Pin 60 length: 60
- Pin 61 length: 61
- Pin 62 length: 62
- Pin 63 length: 63
- Pin 64 length: 64
- Pin 65 length: 65
- Pin 66 length: 66
- Pin 67 length: 67
- Pin 68 length: 68
- Pin 69 length: 69
- Pin 70 length: 70
- Pin 71 length: 71
- Pin 72 length: 72
- Pin 73 length: 73
- Pin 74 length: 74
- Pin 75 length: 75
- Pin 76 length: 76
- Pin 77 length: 77
- Pin 78 length: 78
- Pin 79 length: 79
- Pin 80 length: 80
- Pin 81 length: 81
- Pin 82 length: 82
- Pin 83 length: 83
- Pin 84 length: 84
- Pin 85 length: 85
- Pin 86 length: 86
- Pin 87 length: 87
- Pin 88 length: 88
- Pin 89 length: 89
- Pin 90 length: 90
- Pin 91 length: 91
- Pin 92 length: 92
- Pin 93 length: 93
- Pin 94 length: 94
- Pin 95 length: 95
- Pin 96 length: 96
- Pin 97 length: 97
- Pin 98 length: 98
- Pin 99 length: 99
- Pin 100 length: 100

Keyed gate/cathode twin plugs with wire length = 350 mm, gate = white, cathode = red
Type ZY 200L (L = Left for pin pair 4/5) UL 758, style 3751



Thyristor

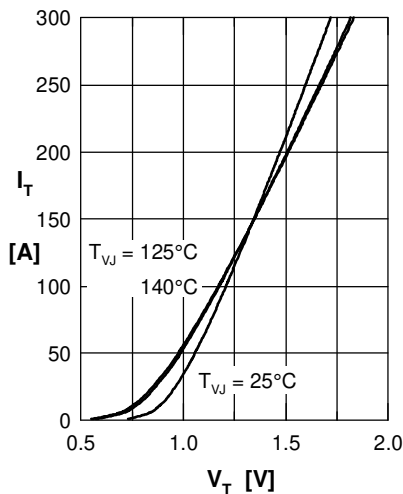


Fig. 1 Forward characteristics

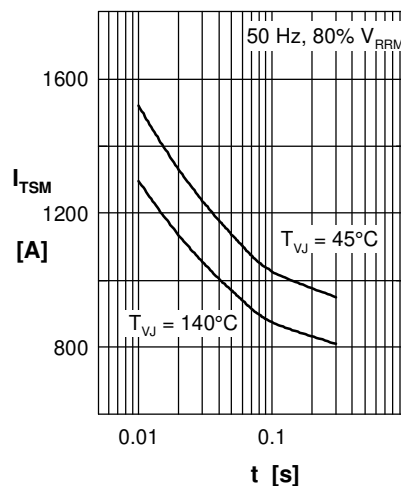


Fig. 2 Surge overload current
 I_{TSM} : crest value, t : duration

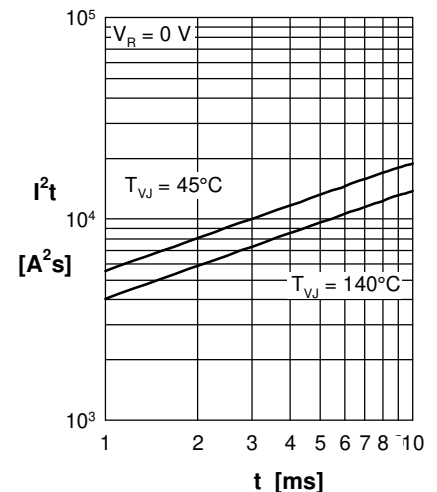


Fig. 3 I^2t versus time (1-10 s)

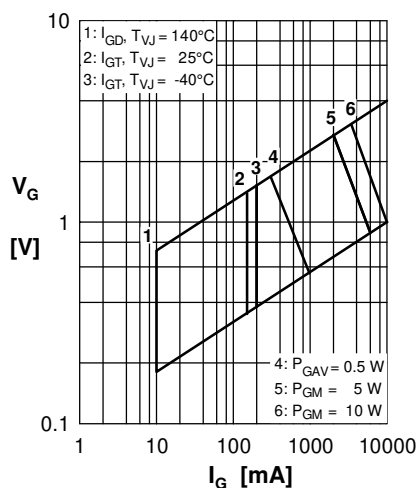


Fig. 4 Gate voltage & gate current

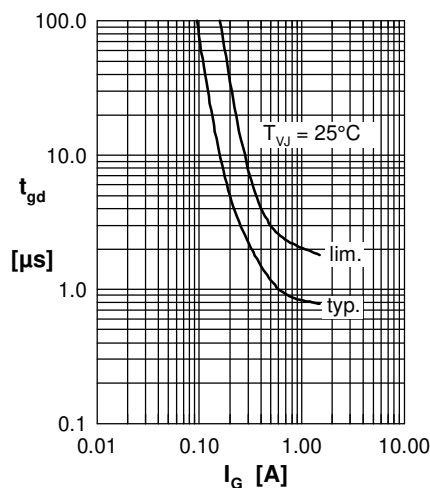


Fig. 5 Gate controlled delay time t_{gd}

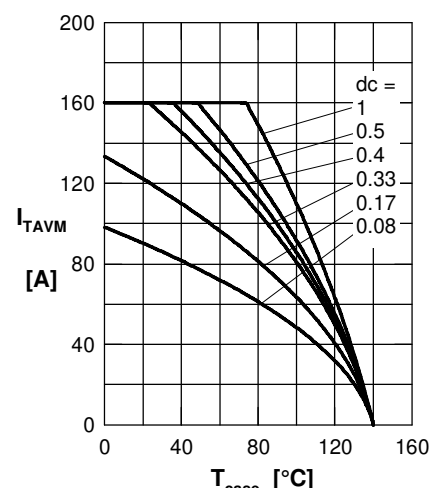


Fig. 6 Max. forward current at case temperature

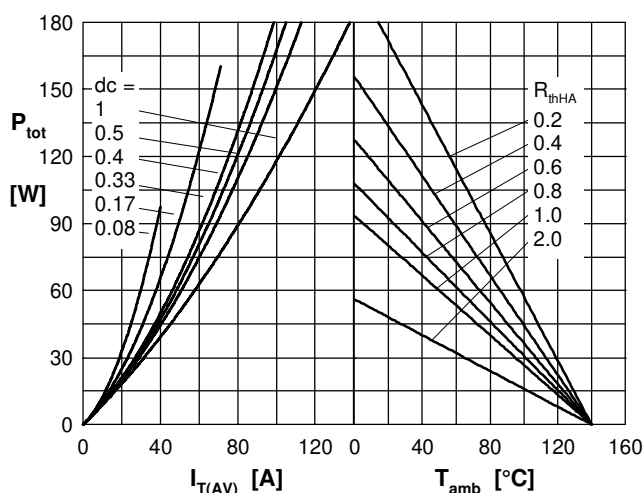


Fig. 7a Power dissipation versus direct output current
 Fig. 7b and ambient temperature

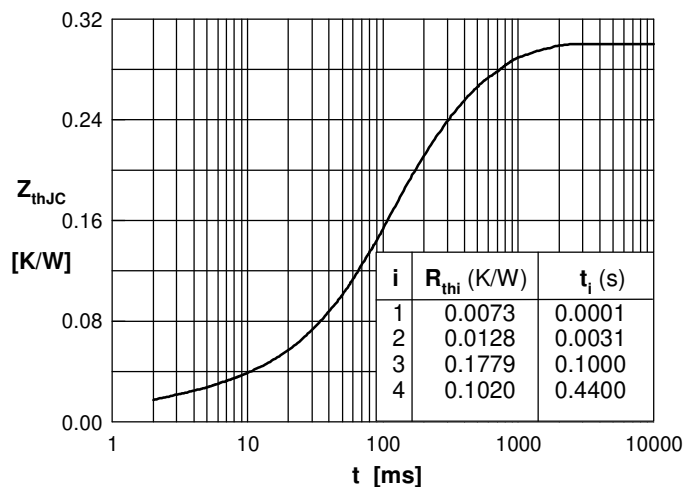


Fig. 8 Transient thermal impedance junction to case